


# Element M15-OF

15" Open Frame Touch Display



Element M15-OF is an IP65 commercial grade open frame touch display. The 15.1" Full Flat Touch Screen LCD Digital Display has a contrast screen 800:1, with slim bezel free design and 1024 x 768 resolution ensure the sharpest of images.


With 10 point multi touch display and I/O's including HDMI, Display Port, VGA and USB, the **M15-OF** is suitable for many applications and multi roles such as Digital Signage Display / Information Display, Self-Check In and Self-Check Out, or Self Service Terminals (Self Ordering).

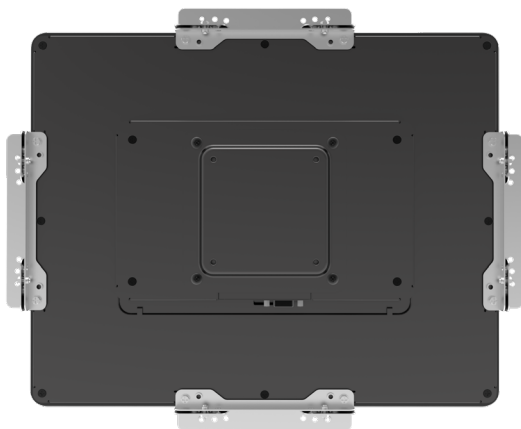

OPTIONAL MOUNT BRACKET



VESA MOUNT 100 X 100MM

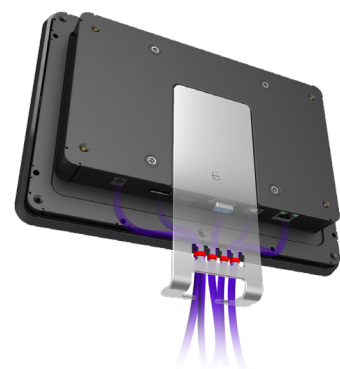

CONVENIENT CABLE MANAGEMENT

# Technical Specifications - Element M15-OF

Item	Parameter	
Size	15" TFT LCD	
Maximum Resolution	1024 x 768	
Contrast Ratio	800:1	
Brightness (Backlight Type)	350 nits (No Touch), 315 nits (Projected Capacitive)	
View Angle	H:160°, V:160°	
Touch LCD Display	Touch Type	Projected Capacitive
	Touch Points	10
	Touch Screen Interface	USB-HID (Type B)
I/O Port	USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
	Video Port	1 x VGA (DB15), DP x 1, HDMI x 1
	Audio Port	Line-Out
	Power Input	1 x 12V DC Jack with lock
Physical Properties	Power Supply	DC 12V with lock External Power
	Housing Colour	Black
	Material	Glass, Plastic (ABS), SECC Metal
	Compliance	Front Side IP65 Compliant
	Dimensions (W x H x D) mm	364.0 x 290.9 x 41.4
	Net Weight (kg)	2.98 kg
	Gross Weight (kg)	4.25 kg
	Carton (W x H x D) mm	460 x 410 x 175
	VESA	100 x 100 mm
	Ball Drop / IK	UL60950(500g/1.3m) and IK08
Safety	Certifications	CCC, CE, FCC Class B
Environment	Operating Temperature / Humidity	0°C ~ 50°C, 20% ~ 80% RH. Non-Condensing
	Storage Temperature / Humidity	-20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing
Optional Peripherals	Remote Key	1 x RJ45 (for OSD connector)
Interface		